

verope ®

# DECK CRANES

verope® special wire ropes

verotop P



Deck Crane



Ship Unloader



## APPLICATIONS


# DECK CRANES

verope® offers various ropes, rope end fittings and customized solutions for deck crane applications. verope® provides a global distribution network for special wire ropes to serve the customers wherever the products are needed.

### verope® offers the following services:

- Technical customer service
  - Technical advice including analysis, e.g. theoretical lifetime calculations
  - Rope & crane inspections (reeving system) and Reporting
  - Damage analysis
  - Training and Seminar
- A broad range of rope tests in our own testing facilities such as:
    - Tensile test up to 2500 kN
    - Bending fatigue test for various rope diameters
    - Various tests to determine the rotational behavior of ropes
    - Elongation measurement
    - Modulus of elasticity determination
    - Rope flexibility tests
    - Measurement of the diameter reduction under load
    - Radial Stability
    - Tension-tension fatigue test

### verope® worldwide

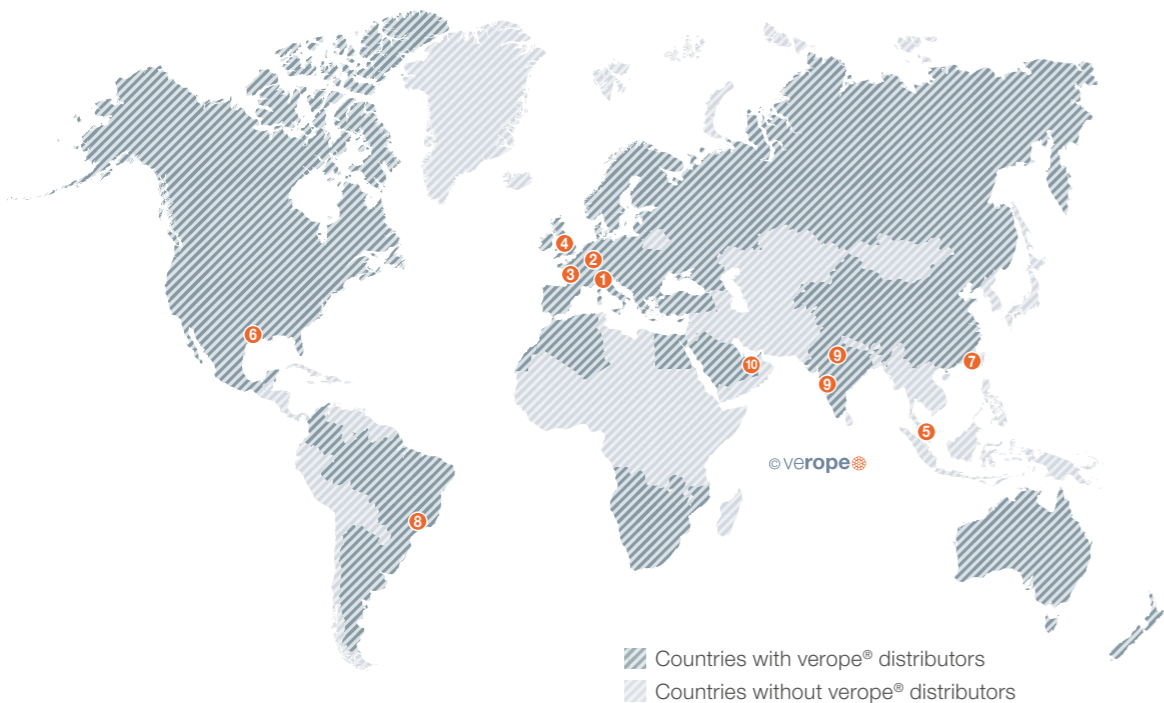


- 1 verope® AG (Headquarters), Zug, Switzerland
- 6 verope® USA, Houston, USA
- 2 verope® Service Center GmbH, Contwig, Germany
- 7 LTI Steel Wire Rope Co., Ltd., Shanghai, China
- 3 verope® France, Paris, France
- 8 verope® do Brasil, Resende, RJ, Brazil
- 4 verope® UK, Birmingham, UK
- 9 verope® Steel Wire Ropes Private Limited, Mumbai & New Delhi, India
- 5 verope® Distribution Singapore Pte. Ltd, Singapore
- 10 verope® Middle East, Dubai, UAE

## STANDARD ROPE END CONNECTIONS



### We are able to offer customized ropes with the correct end connections for crane brands such as:

- Liebherr • Terex • Sennebogen • Tadano Faun • Manitowoc • And much more

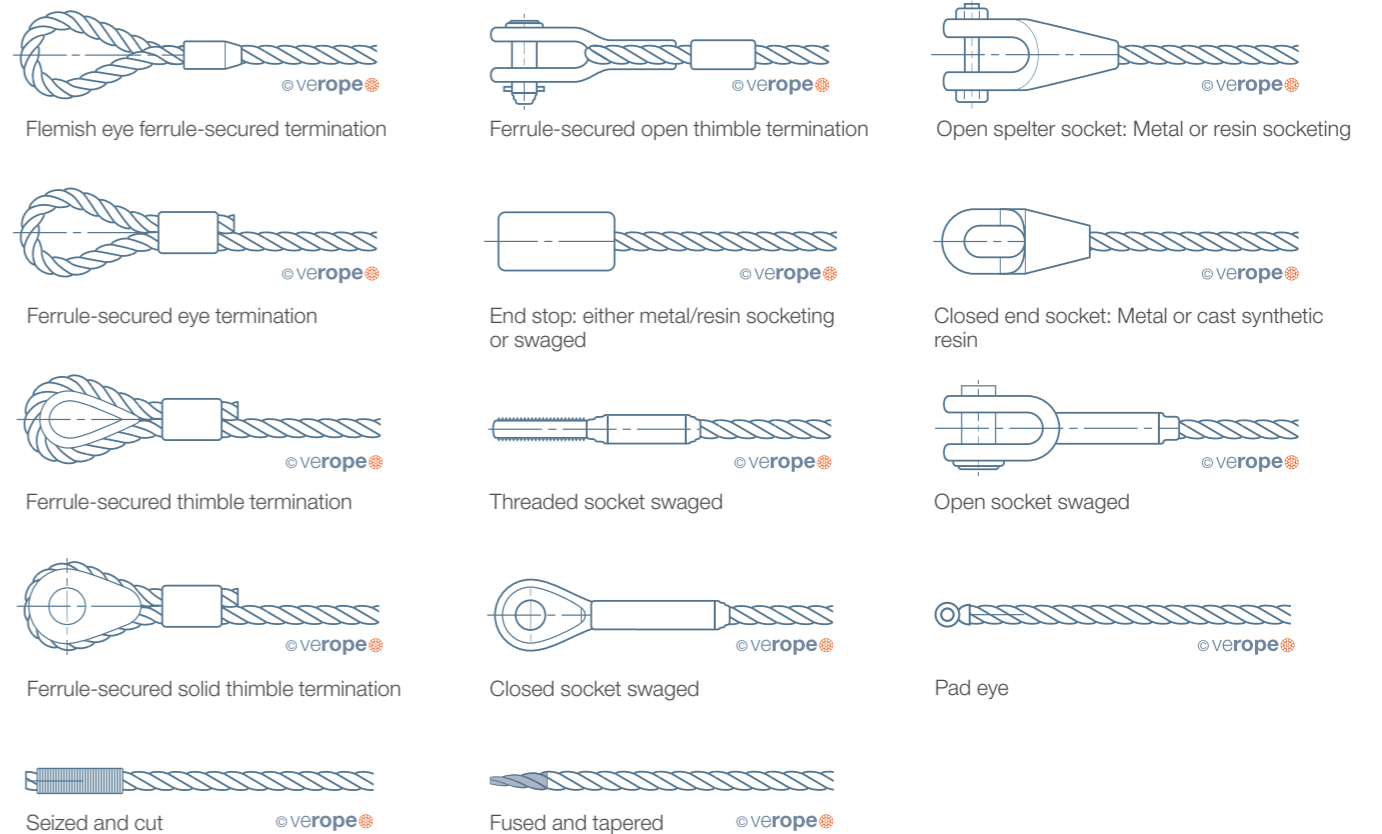

verope® can also offer customer-specific solutions in addition to the standard rope end connections. Special solutions on request.

## ROPE APPLICATIONS FOR DECK CRANES





Deck Crane




Ship Unloader


# DECK CRANE

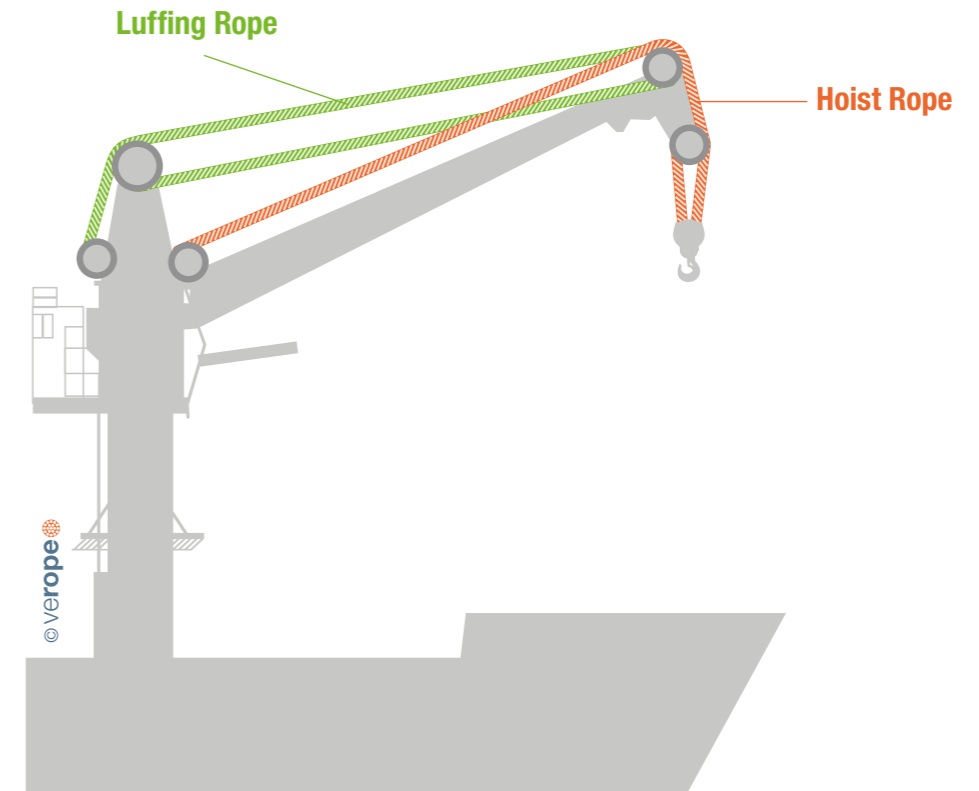


vero **4** is a 4-strand rotation-resistant rope with compacted strands.




verotop **P** is a rotation-resistant rope with compacted strands and a rope core covered with a plastic layer.




verotop **XP** is a rotary swaged rotation-resistant rope with compacted strands and a rope core covered with a plastic layer.




veropro **8** is an 8-strand, non-rotation-resistant rope with compacted outer strands and a rope core covered with a plastic layer.



veropro **8 RS** is a rotary swaged 8-strand, non-rotation resistant rope with compacted outer strands and a rope core covered with a plastic layer.



veropower **8**<sup>1</sup> is a rotary swaged 8-strand, non-rotation resistant rope in parallel lay construction with compacted outer strands and a rope core covered with a plastic layer.





veropro **10**<sup>2</sup> is a very flexible 10-strand, non-rotation-resistant rope with compacted strands and a rope core covered with a plastic layer.




<sup>1</sup>For special applications | <sup>2</sup>Only available from 30 mm diameter




# SHIP UNLOADER

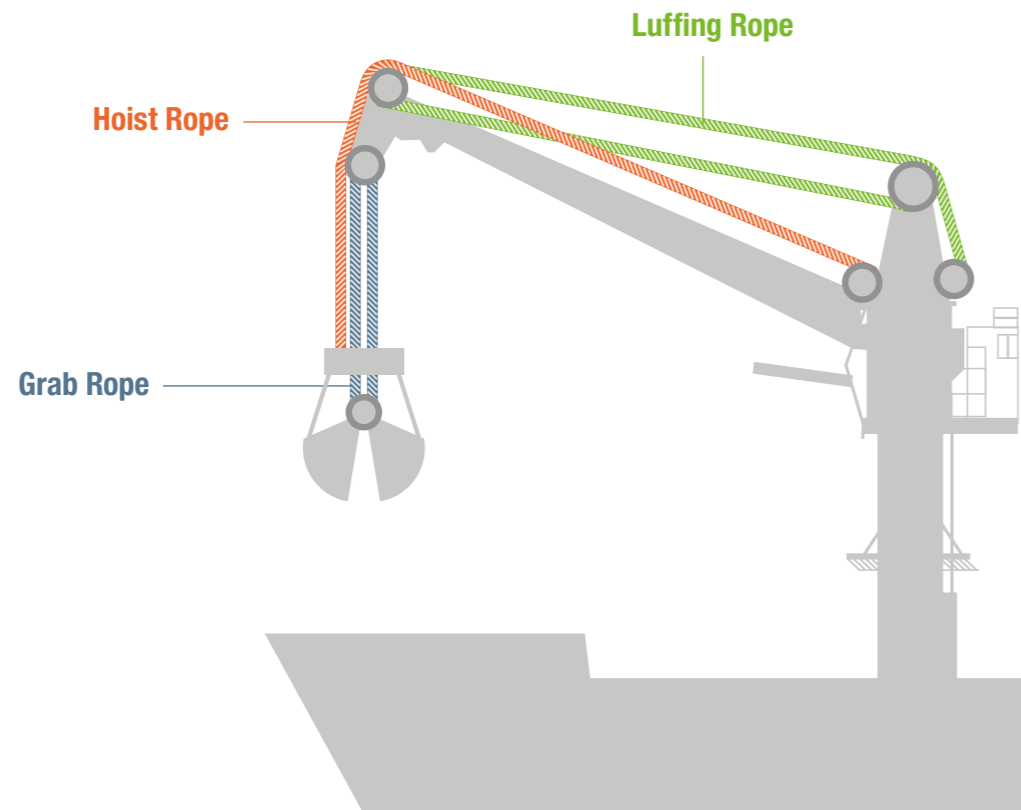


vero **4**<sup>1,2</sup> is a 4-strand rotation-resistant rope with compacted strands.




veropro **8**<sup>3</sup> is an 8-strand, non-rotation-resistant rope with compacted outer strands and a rope core covered with a plastic layer.




veropro **8 RS**<sup>3</sup> is a rotary swaged 8-strand, non-rotation resistant rope with compacted outer strands and a rope core covered with a plastic layer.




veropower **8**<sup>4,3</sup> is a rotary swaged 8-strand, non-rotation resistant rope in parallel lay construction with compacted outer strands and a rope core covered with a plastic layer.



verotop **P**<sup>2</sup> is a rotation-resistant rope with compacted strands and a rope core covered with a plastic layer.



veropro **10**<sup>3</sup> is a very flexible 10-strand, non-rotation-resistant rope with compacted strands and a rope core covered with a plastic layer.



verotop **XP**<sup>2</sup> is a rotary swaged rotation-resistant rope with compacted strands and a rope core covered with a plastic layer.

<sup>1</sup> Grab operation | <sup>2</sup> if rotation-resistant or low rotation-resistant ropes are required  
<sup>3</sup> if non rotation-resistant ropes with right or left lay are required | <sup>4</sup> For special applications

ADVERTISEMENT

# TECHNICAL BROCHURE

verope<sup>®</sup> special wire ropes


The new and completely revised “Technical Brochure” is aimed at all customers, distributors and rope users. The brochure is available in German and English and provides useful information on the correct handling of special wire ropes by means of numerous graphics and tables.

Order here: [marketing@verope.com](mailto:marketing@verope.com)  
[www.verope.com](http://www.verope.com)







# SPECIAL WIRE ROPES FOR APPLICATIONS IN DECK CRANES




verotop P




verotop XP




vero 4




veropro 8 RS



veropower 8




veropro 10



veropro 8

## VEROTOP P

provides a very stable rope structure and achieves excellent bending fatigue results.



Nominal rope diameter		Approx mass	Minimum breaking force			
			Rope grade			
			1960		2160	
mm*	Inch	kg/m	kN	t	kN	t
16	5/8	1.248	241.7	24.6	252.7	25.7
17		1.408	272.8	27.8	285.3	29.1
18		1.579	305.8	31.2	319.8	32.6
19	3/4	1.759	340.8	34.7	356.3	36.3
20		1.949	377.6	38.5	394.8	40.2
21		2.149	416.3	42.4	435.3	44.4
22		2.359	456.9	46.6	477.7	48.7
22.4		2.445	473.6	48.3	495.3	50.5
23		2.578	499.3	50.9	522.2	53.2
24		2.807	543.7	55.4	568.6	57.9
25		3.046	590.0	60.1	616.9	62.9
25.4	1	3.144	609.0	62.1	636.8	64.9
26		3.294	638.1	65	667.3	68
27		3.553	688.1	70.1	719.6	73.3
28		3.821	740.1	75.4	773.9	78.9
28.6	1-1/8	3.986	772.1	78.7	807.4	82.3
29		4.099	793.9	80.9	830.1	84.6
30		4.386	849.6	86.6	888.4	90.5
31		4.683	907.1	92.4	948.6	96.7
32	1-1/4	4.990	966.6	98.5	1011	103
33		5.307	1028	104.7	1075	109.5
34		5.634	1091	111.2	1141	116.3
35	1-3/8	5.970	1156	117.8	1209	123.2
36		6.316	1223	124.7	1279	130.4
38	1-1/2	7.037	1363	138.9	1425	145.2
40		7.797	1510	153.9	1579	160.9
42		8.597	1665	169.7	1741	177.4
43		9.011	1745	177.9	1825	186
44		9.435	1827	186.2	1911	194.7
45	1-3/4	9.869	1911	194.8	1999	203.7
46		10.312	1997	203.5	2089	212.8
48		11.228	2175	221.6	2274	231.7
50	2	12.183	2360	240.5	2468	251.5
52		13.178	2552	260.1	2669	272
54	2-1/8	14.211	2753	280.5	2878	293.3
56		15.86	2908	296.53	3058 <sup>2</sup>	311.83 <sup>2</sup>
58		17.01	3098	315.91	3258 <sup>2</sup>	332.22 <sup>2</sup>
60		18.20	3333	339.87	3505 <sup>2</sup>	357.41 <sup>2</sup>
62		19.44	3517	358.63	3698 <sup>2</sup>	377.09 <sup>2</sup>
64		20.71	3775	384.94	3969 <sup>2</sup>	404.73 <sup>2</sup>
66		21.37	3972	405.03	4094 <sup>2</sup>	417.47 <sup>2</sup>
68		23.38	4251	433.48	4470 <sup>2</sup>	455.81 <sup>2</sup>
70	2-3/4	24.78	4535	462.44	4769 <sup>2</sup>	486.3 <sup>2</sup>
72		26.21	4809	490.38	5057 <sup>2</sup>	515.67 <sup>2</sup>
74		27.69	5064	516.38		

verotop P/2024/10


Nominal rope diameter		Approx mass		Minimum breaking force tons <sup>1</sup> of 2000 lbs	
				Rope grade	
				1960	2160
mm*	Inch	lb/ft <sup>1</sup>	kg/ft <sup>1</sup>	1960	2160
16	5/8	0.84	0.38	27.2	28.4
17		0.95	0.43	30.7	32.1
18		1.06	0.48	34.4	35.9
19	3/4	1.18	0.54	38.3	40.1
20		1.31	0.59	42.4	44.4
21		1.44	0.66	46.8	48.9
22		1.58	0.72	51.4	53.7
22.4		1.64	0.75	53.2	55.7
23		1.73	0.79	56.1	58.7
24		1.89	0.86	61.1	63.9
25		2.05	0.93	66.3	69.3
25.4	1	2.11	0.96	68.5	71.6
26		2.21	1	71.7	75
27		2.39	1.08	77.3	80.9
28		2.57	1.16	83.2	87
28.6	1-1/8	2.68	1.22	86.8	90.8
29		2.75	1.25	89.2	93.3
30		2.95	1.34	95.5	99.9
31		3.15	1.43	102	106.6
32	1-1/4	3.35	1.52	108.6	113.6
33		3.57	1.62	115.5	120.8
34		3.79	1.72	122.7	128.3
35	1-3/8	4.01	1.82	130	135.9
36		4.24	1.93	137.5	143.8
38	1-1/2	4.73	2.15	153.2	160.2
40		5.24	2.38	169.8	177.5
42		5.78	2.62	187.2	195.7
43		6.06	2.75	196.2	205.1
44		6.34	2.88	205.4	214.8
45	1-3/4	6.63	3.01	214.9	224.7
46		6.93	3.14	224.5	234.8
48		7.55	3.42	244.5	255.6
50	2	8.19	3.71	265.2	277.4
52		8.85	4.02	286.9	300
54	2-1/8	9.55	4.33	309.4	323.5
56		10.66	4.83	326.9	343.7 <sup>2</sup>
58		11.43	5.18	348.2	366.2 <sup>2</sup>
60		12.23	5.55	374.6	394.0 <sup>2</sup>
62		13.06	5.92	395.3	415.7 <sup>2</sup>
64		13.92	6.31	424.3	446.1 <sup>2</sup>
66		14.36	6.51	446.5	460.2 <sup>2</sup>
68		15.71	7.13	477.8	502.4 <sup>2</sup>
70	2-3/4	16.65	7.55	509.8	536.1 <sup>2</sup>
72		17.61	7.99	540.6	568.4 <sup>2</sup>
74		18.61	8.44	569.2	

© Verope

\*Standard tolerance: +2% to 4%, other tolerances possible upon agreement. Other and special rope diameters are available upon request.  
 1) The values are indicative only. Authoritative figures remain the metric ones! Errors and omissions excepted! The cross-section shows a typical rope diameter and can vary within the range. Subject to modifications, this may change the specifications.  
 Relevant is our website [www.verope.com](http://www.verope.com)

## VEROTOP XP

offers superior crushing resistance and best resistance to abrasion.

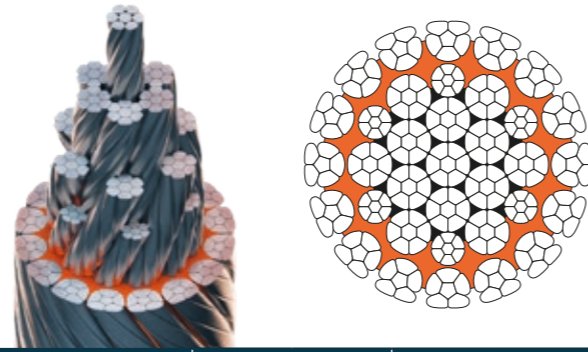

Nominal rope diameter		Approx mass	Minimum breaking force			
			Rope grade			
			1960		2160	
mm*	Inch	kg/m	kN	t	kN	t
17		1.446	281.7	28.7	306.8	31.3
18		1.621	315.8	32.2	344.0	35.1
19	3/4	1.806	351.9	35.9	383.3	39.1
20		2.001	389.9	39.7	424.7	43.3
21		2.206	429.9	43.8	468.2	47.7
22		2.421	471.8	48.1	513.8	52.4
22.4		2.510	489.1	49.8	532.7	54.3
23		2.646	515.7	52.5	561.6	57.2
24		2.882	561.5	57.2	611.5	62.3
25		3.127	609.3	62.1	663.5	67.6
25.4	1	3.228	628.9	64.1	684.9	69.8
26		3.382	659.0	67.1	717.7	73.1
27		3.647	710.6	72.4	773.9	78.9
28		3.922	764.3	77.9	832.3	84.8
28.6	1-1/8	4.092	797.4	81.3	868.4	88.5
29		4.207	819.8	83.5	892.8	91
30		4.503	877.3	89.4	955.5	97.4
31		4.808	936.8	95.5	1020	104
32	1-1/4	5.123	998.2	101.7	1087	110.8
33		5.448	1062	108.2	1156	117.8
34		5.783	1127	114.8	1227	125.1
35	1-3/8	6.128	1194	121.7	1301	132.5
36		6.484	1263	128.7	1376	140.2
38	1-1/2	7.224	1408	143.4	1533	156.2
40		8.004	1560	158.9	1699	173.1
41.3	1-5/8	8.533	1663	169.4	1811	184.5
42		8.825	1720	175.2	1873	190.8
44		9.685	1887	192.3	2055	209.4
45	1-3/4	10.131	1974	201.2	2150	219.1
46		10.586	2063	210.2	2246	228.9
47.5	1-7/8	11.288	2199	224.1	2395	244.1
48		11.526	2246	228.9	2446	249.3
50 <sup>2</sup>	2	12.507	2437	248.5	2654	270.6


Nominal rope diameter		Approx mass	Minimum breaking force tons <sup>1</sup> of 2000 lbs			
			Rope grade			
			1960		2160	
mm*	Inch	lb/ft <sup>1</sup>	kg/ft <sup>1</sup>	1960	2160	
17		0.97	0.44	31.7	34.5	
18		1.09	0.49	35.5	38.7	
19	3/4	1.21	0.55	39.6	43.1	
20		1.34	0.61	43.8	47.7	
21		1.48	0.67	48.3	52.6	
22		1.63	0.74	53	57.8	
22.4		1.69	0.77	55	59.9	
23		1.78	0.81	58	63.1	
24		1.94	0.88	63.1	68.7	
25		2.1	0.95	68.5	74.6	
25.4	1	2.17	0.98	70.7	77	
26		2.27	1.03	74.1	80.7	
27		2.45	1.11	79.9	87	
28		2.64	1.2	85.9	93.6	
28.6	1-1/8	2.75	1.25	89.6	97.6	
29		2.83	1.28	92.1	100.4	
30		3.03	1.37	98.6	107.4	
31		3.23	1.47	105.3	114.7	
32	1-1/4	3.44	1.56	112.2	122.2	
33		3.66	1.66	119.3	129.9	
34		3.89	1.76	126.7	137.9	
35	1-3/8	4.12	1.87	134.2	146.2	
36		4.36	1.98	142	154.7	
38	1-1/2	4.85	2.2	158.2	172.3	
40		5.38	2.44	175.3	190.9	
41.3	1-5/8	5.73	2.6	186.9	203.5	
42		5.93	2.69	193.3	210.5	
44		6.51	2.95	212.1	231	
45	1-3/4	6.81	3.09	221.9	241.6	
46		7.11	3.23	231.8	252.5	
47.5	1-7/8	7.58	3.44	247.2	269.2	
48		7.75	3.51	252.4	274.9	
50 <sup>2</sup>	2	8.40	3.81	273.9	298.3	

© Verope

\*Standard tolerance: +2% to 4%, other tolerances possible upon agreement. Other and special rope diameters are available upon request.  
 1) The values are indicative only. Authoritative figures remain the metric ones! Errors and omissions excepted! The cross-section shows a typical rope diameter and can vary within the range. Subject to modifications, this may change the specifications.  
 Relevant is our website [www.verope.com](http://www.verope.com)

## VERO 4

Suits best for harshest working conditions with dynamic impact loads.

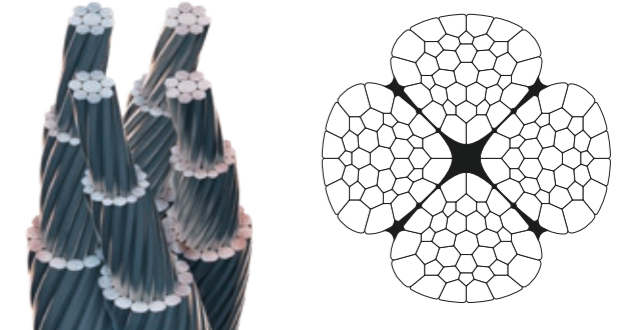

Nominal rope diameter		Approx mass	Minimum breaking force			
			Rope grade			
			1960		2160	
mm*	Inch	kg/m	kN	t	kN	t
8	5/16	0.270	55.9	5.7	59.7	6.1
9		0.341	70.8	7.2	75.5	7.7
10		0.421	87.4	8.9	93.2	9.5
11	7/16	0.510	105.8	10.8	112.8	11.5
12		0.607	125.9	12.8	134.3	13.7
13		0.712	147.7	15.1	157.6	16.1
14		0.826	171.3	17.5	182.7	18.6
15		0.948	196.7	20	209.8	21.4
16	5/8	1.078	223.8	22.8	238.7	24.3
18		1.365	283.2	28.9	302.1	30.8
19	3/4	1.521	315.6	32.2	336.6	34.3
20		1.685	349.7	35.6	373.0	38
22		2.039	423.1	43.1	451.3	46
24		2.426	503.5	51.3	537.0	54.7
25		2.633	546.4	55.7	582.7	59.4
26		2.848	591.0	60.2	630.3	64.2
27		3.071	637.3	64.9	679.7	69.3
28		3.303	685.4	69.8	731.0	74.5
29		3.543	735.2	74.9	784.1	79.9
30		3.791	786.8	80.2	839.1	85.5
31		4.048	840.1	85.6	896.0	91.3
32	1-1/4	4.314	895.2	91.2	954.8	97.3
33		4.587	952.0	97	1015	103.5
33.5		4.727	981.1	100	1046	106.6
34		4.870	1011	103	1078	109.8
35	1-3/8	5.160	1071	109.1	1142	116.4
36		5.459	1133	115.5	1208	123.1

© Verope


\*Standard tolerance: +2% to 4%, other tolerances possible upon agreement. Other and special rope diameters are available upon request.  
 1) The values are indicative only. Authoritative figures remain the metric ones! Errors and omissions excepted! The cross-section shows a typical rope diameter and can vary within the range. Subject to modifications, this may change the specifications.  
 Relevant is our website [www.verope.com](http://www.verope.com)





## VEROPOWER 8

has very high structural stability, achieves excellent bending fatigue results.

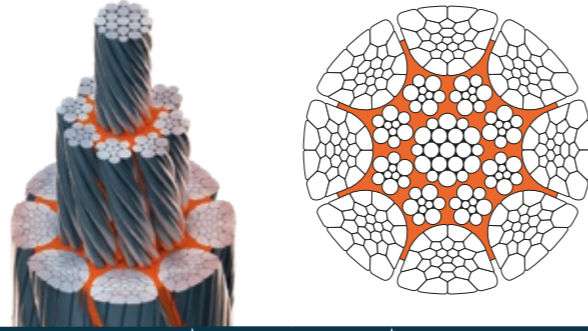

Nominal rope diameter		Approx mass	Minimum breaking force			
			Rope grade			
			1960		2160	
mm*	Inch	kg/m	kN	t	kN	t
12		0.717	147.4	15	158.8	16.2
12.7	1/2	0.803	165.1	16.8	177.9	18.1
13		0.842	173.0	17.6	186.4	19
14		0.976	200.6	20.4	216.2	22
15		1.121	230.3	23.5	248.2	25.3
16	5/8	1.275	262.0	26.7	282.3	28.8
17		1.440	295.8	30.1	318.7	32.5
18		1.614	331.6	33.8	357.3	36.4
19	3/4	1.798	369.5	37.6	398.1	40.6
20		1.992	409.4	41.7	441.2	45
21		2.197	451.3	46	486.4	49.6
22		2.411	495.3	50.5	533.8	54.4
22.4		2.499	513.5	52.3	553.4	56.4
23		2.635	541.4	55.2	583.4	59.5
24		2.869	589.5	60.1	635.3	64.7
25		3.113	639.6	65.2	689.3	70.2
25.4	1	3.214	660.3	67.3	711.5	72.5
26		3.367	691.8	70.5	745.6	76
27		3.631	746.1	76	804.0	81.9
28		3.905	802.4	81.8	864.7	88.1
28.6	1-1/8	4.074	837.1	85.3	902.1	91.9
29		4.189	860.7	87.7	927.5	94.5
30		4.483	921.1	93.9	992.6	101.1
31		4.787	983.5	100.2	1060	108
32	1-1/4	5.101	1048	106.8	1129	115.1
33		5.424	1115	113.6	1201	122.4
34		5.758	1183	120.6	1275	129.9
35	1-3/8	6.102	1254	127.8	1351	137.7
36		6.455	1326	135.2	1429	145.7
38	1-1/2	7.193	1478	150.6	1593	162.3
40		7.970	1637	166.9	1765	179.8
41.3	1-5/8	8.496	1746	177.9	1881	191.7
42		8.787	1805	184	1946	198.2
44		9.643	1981	201.9	2135	217.6
45	1-3/4	10.09	2072	211.2	2233	227.6
46		10.54	2166	220.7	2334	237.8
47.5	1-7/8	11.24	2309	235.3	2488	253.6
48		11.48	2358	240.3	2541	258.9

Nominal rope diameter		Approx mass		Minimum breaking force tons <sup>1</sup> of 2000 lbs	
				Rope grade	
				1960	2160
mm*	Inch	lb/ft <sup>1</sup>	kg/ft <sup>1</sup>	1960	2160
12		0.48	0.22	16.6	17.9
12.7	1/2	0.54	0.24	18.6	20
13		0.57	0.26	19.4	21
14		0.66	0.3	22.5	24.3
15		0.75	0.34	25.9	27.9
16	5/8	0.86	0.39	29.4	31.7
17		0.97	0.44	33.2	35.8
18		1.08	0.49	37.3	40.2
19	3/4	1.21	0.55	41.5	44.8
20		1.34	0.61	46	49.6
21		1.48	0.67	50.7	54.7
22		1.62	0.74	55.7	60
22.4		1.68	0.76	57.7	62.2
23		1.77	0.8	60.9	65.6
24		1.93	0.87	66.3	71.4
25		2.09	0.95	71.9	77.5
25.4	1	2.16	0.98	74.2	80
26		2.26	1.03	77.8	83.8
27		2.44	1.11	83.9	90.4
28		2.62	1.19	90.2	97.2
28.6	1-1/8	2.74	1.24	94.1	101.4
29		2.81	1.28	96.7	104.3
30		3.01	1.37	103.5	111.6
31		3.22	1.46	110.5	119.1
32	1-1/4	3.43	1.56	117.8	126.9
33		3.64	1.65	125.3	135
34		3.87	1.76	133	143.3
35	1-3/8	4.1	1.86	140.9	151.9
36		4.34	1.97	149.1	160.7
38	1-1/2	4.83	2.19	166.1	179
40		5.36	2.43	184.1	198.3
41.3	1-5/8	5.71	2.59	196.2	211.4
42		5.9	2.68	202.9	218.7
44		6.48	2.94	222.7	240
45	1-3/4	6.78	3.08	232.9	251
46		7.08	3.21	243.4	262.3
47.5	1-7/8	7.55	3.43	259.5	279.7
48		7.71	3.5	265	285.6

## VEROPRO 10

is an extremely flexible rope with very high breaking strength and achieves excellent bending fatigue results.



Nominal rope diameter		Approx mass	Minimum breaking force			
			Rope grade			
			1960		2160	
mm*	Inch	kg/m	kN	t	kN	t
30		4.152	828.0	84.4	891.6	90.9
32	1-1/4	4.724	942.1	96	1014.4	103.4
34		5.333	1063.5	108.4	1145.2	116.7
36		5.979	1192.3	121.5	1283.9	130.8
38	1-1/2	6.662	1328.4	135.4	1430.5	145.8
40		7.381	1472.0	150	1585.1	161.5
42		8.138	1622.8	165.4	1747.5	178.1
44		8.931	1781.1	181.5	1917.9	195.4
46		9.762	1946.7	198.4	2096.3	213.6
48		10.629	2119.6	216	2282.5	232.6
50	2	11.533	2299.9	234.4	2476.7	252.4
52		12.474	2487.6	253.5	2678.8	273
54	2-1/8	13.452	2682.6	273.4	2888.8	294.4
56		14.467	2885.0	294	3106.8	316.6
58		15.519	3094.8	315.4	3332.6	339.6
60	2-3/8	16.608	3311.9	337.5	3566.4	363.4
62		17.733	3536.4	360.4	3808.1	388.1
64	2-1/2	18.896	3768.2	384	4057.8	413.5
66	2-5/8	20.095	4007.4	408.4	4315.4	439.7
68		21.332	4254.0	433.5	4580.9	466.8
70	2-3/4	22.605	4507.9	459.4	4854.3	494.7

Nominal rope diameter		Approx mass		Minimum breaking force tons <sup>1</sup> of 2000 lbs	
				Rope grade	
				1960	2160
mm*	Inch	lb/ft <sup>1</sup>	kg/ft <sup>1</sup>	1960	2160
30	1-1/4	2.79	1.27	93.1	100.2
32		3.17	1.44	105.9	114
34		3.58	1.63	119.5	128.7
36	1-1/2	4.02	1.82	134	144.3
38		4.48	2.03	149.3	160.8
40		4.96	2.25	165.4	178.2
42		5.47	2.48	182.4	196.4
44		6	2.72	200.2	215.6
46		6.56	2.98	218.8	235.6
48	2	7.14	3.24	238.2	256.6
50		7.75	3.52	258.5	278.4
52	2-1/8	8.38	3.8	279.6	301.1
54		9.04	4.1	301.5	324.7
56		9.72	4.41	324.3	349.2
58	2-3/8	10.43	4.73	347.9	374.6
60		11.16	5.06	372.3	400.9
62	2-1/2	11.92	5.41	397.5	428
64	2-5/8	12.7	5.76	423.5	456.1
66		13.5	6.13	450.4	485
68	2-3/4	14.33	6.5	478.1	514.9
70		15.19	6.89	506.7	545.6

© Verope

\*Standard tolerance: +2% to 4%, other tolerances possible upon agreement. Other and special rope diameters are available upon request.

1) The values are indicative only. Authoritative figures remain the metric ones! Errors and omissions excepted! The cross-section shows a typical rope diameter and can vary within the range. Subject to modifications, this may change the specifications.

Relevant is our website [www.verope.com](http://www.verope.com)

© Verope

\*Standard tolerance: +2% to 4%, other tolerances possible upon agreement. Other and special rope diameters are available upon request.

1) The values are indicative only. Authoritative figures remain the metric ones! Errors and omissions excepted! The cross-section shows a typical rope diameter and can vary within the range. Subject to modifications, this may change the specifications.

Relevant is our website [www.verope.com](http://www.verope.com)

## **DECK CRANES**

Edition April 2025

All rights reserved.

Copyright 2025 verope® AG.

Reprint or reproduction of any material in part or in whole only with express written consent of the publisher.

Printed on environmentally friendly FSC® paper.

**verope** ®

rely on

### **verope® AG**

St. Antons-Gasse 4a

CH-6300 Zug / Switzerland

Tel: +41 (0) 41 72 80 880

Fax: +41 (0) 41 72 80 888

**[www.verope.com](http://www.verope.com)**

**[info@verope.com](mailto:info@verope.com)**